




Fuse Links J Series

**FUSES  
TYPE J**



400/415/450 Volt Electricity Supply Distribution Fuse-Links BS88-2/IEC60269

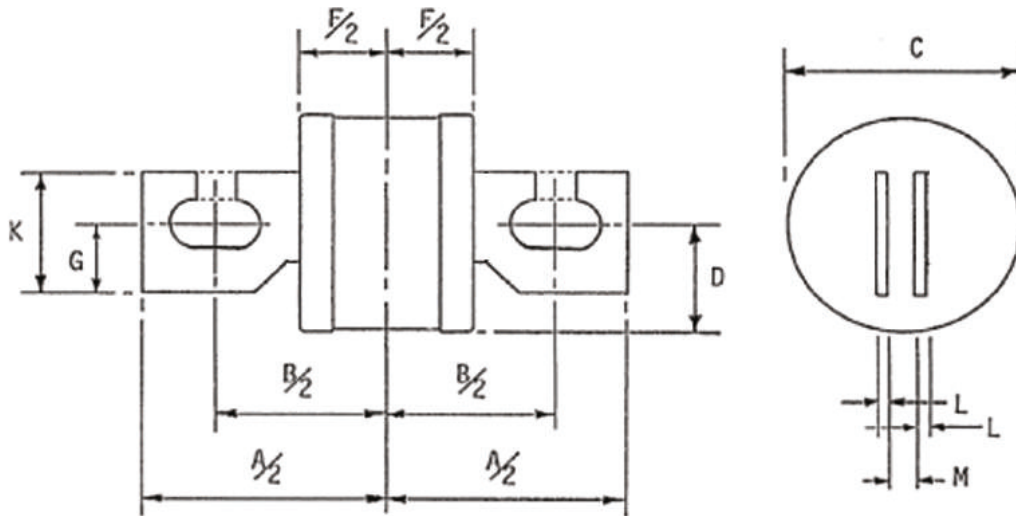

BS88 Ref.	Type Ref.	Current Ratings (A)	Dimensions (mm)									
			A	B	C	D	F	G	K	L	M	
			max	nom	max	max	max	nom	max	nom	max/min	
<b>STANDARDIZED DIMENSIONS</b>												
	JPU	20*,32*,40*,50*,63*,80,100,125*	112	82	26	14	45	18	31	2.4	6.53 6.45	
	JPU	160	112	82	31	16	45	18	31	2.4		
	JPU	200,250	112	82	35	18	45	18	31	2.4		
	JPU	315,355,400	112	82	41	18	45	18	31	2.4		
	JPU	450*,500*	112	82	51	18	45	18	31	2.4		
	JPU	560*,630*	112	82	61	21	45	18	31	2.4		
	JSU	20*,32*,40*,50*,63*,80,100,125*,160	132	92	31	16	45	22	38	3.2	8.13 8.05	
	JSU	200,250	132	92	35	17	45	22	38	3.2		
	JSU	315,355,400	132	92	41	20	45	22	38	3.2		
	JSU	450*500	132	92	51	20	45	22	38	3.2		
	JSU	560*630	132	92	61	25	45	22	38	3.2		
	JSU	800*	132	92	73	25	45	22	38	3.2		
<b>NON-STANDARDIZED DIMENSIONS</b>												
	JHU	20*,32*,40*,50*,63*,80*,100,125*,160	100	76	31	11	45	18	31	1.6	4.25 4.17	
	JHU	200,250	100	76	35	13	45	18	31	1.6		
	JHU	315	100	76	41	12	45	18	31	1.6		