




## Tap CONNECTORS

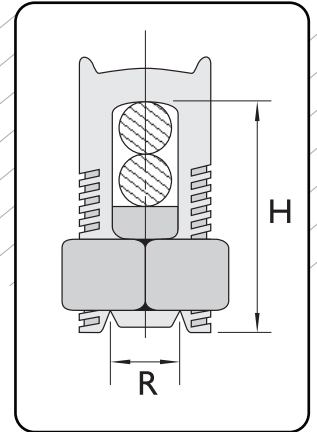

Specially designed by Meter & Power to accommodate a broad mix of copper and Aluminum ACSR AAS cables. Body made of electrolytic copper Alloy or high strength AL Alloy .Tin plated for maxium conductivity, for all combinations of Aluminum to Aluminum,Aluminum to Copper, Copper to copper or plated conductors of Tin or Silver. CSA,UL Certified

M&P CATA. NUMBER	DRIVERS CONDUCTORS		CONNECTORS DIMENSIONS	
	mm <sup>2</sup>	Al - Cu mm <sup>2</sup>	R	H
MPFB-10	10	2,5 - 10	4.1	20.5
MPFB-16	16	2,5 - 16	5.3	25.5
MPFB-25	25	4 - 25	6.8	29.0
MPFB-35	35	4 - 35	7.9	32.0
MPFB-50	50	4 - 50	9.5	37.0
MPFB-70	70	10 - 70	10.7	41.0
MPFB-95	95	10 - 95	13.5	48.5
MPFB-120	120	10 - 120	14.7	53.5
MPFB-150	150	16 - 150	16.2	54.0
MPFB-185	185	25 - 185	17.8	61.0
MPFB-240	240	95 - 240	20.7	68.5

M&P CATA. NUMBER	DRIVERS CONDUCTORS		CONNECTORS DIMENSIONS	
	mm <sup>2</sup>	mm <sup>2</sup>	R	H
MPFB-10	10	1,5 - 10	4.1	20.5
MPFB-16	16	2,5 - 16	5.3	23,0
MPFB-25	25	2,5 - 25	6.8	27,5
MPFB-35	35	2,5 - 35	7.9	29,0
MPFB-50	50	2,5 - 50	9.5	35,0
MPFB-70	70	2,5 - 70	10.7	39,0
MPFB-95	95	25 - 95	13.5	45,0
MPFB-120	120	10 - 120	14.7	47,0
MPFB-150	150	10 - 150	16.2	51,0
MPFB-185	185	50 - 185	17.8	56,5
MPFB-240	240	95 - 240	20.7	68.0

