



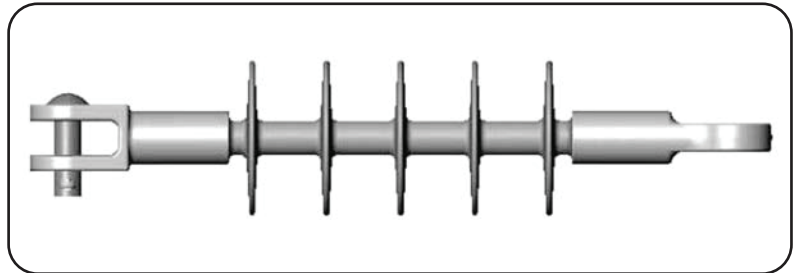

DISTRIBUTION DEADEND INSULATOR

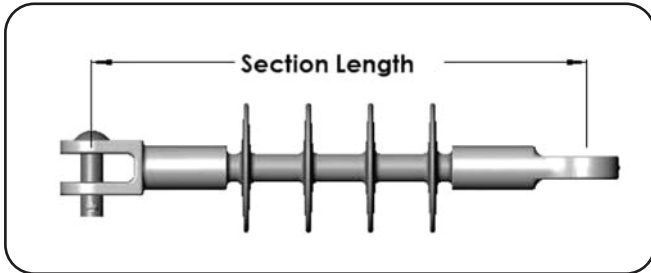

Notes:

- SML= 15,737 lbs [70 kN]
- RTL = 7,869 lbs [35 kN]
- All ratings meet or exceed the requirements of ANSI C29.13 (2000) and LWIWG01(96)
- Corrosion Resistant Boron Free Fiberglass Core / Silicone Housing / ANSI 524 Clevis & Tongue End Fittings
- HP Suffix denotes Hex Pin
- For other product options, contact your local MPS Sales Representative
- RUS Accepted

Catalog Number	Line Voltage	Section Length (In)	Dri Acr (In)	Leakage (In)	Dry Electrical Flashover (KV 60 Hz)	Wet Electrical Flashover (KV 60 Hz)	CIFO+ (KV)	Neg (KV) CIFO
PMDS-15M	15	13.0	7.6	15.8	90	65	140	145
PMDS-35M	28	17.0	11.6	24.7	130	100	190	220
PMDS-15M	28	18.75	13.6	31.5	150	135	255	265
PMDS-35M	35	22.0	16.8	37.6	170	155	280	290

