




Wrench Screw Anchor Triple Standard/ Tripleye

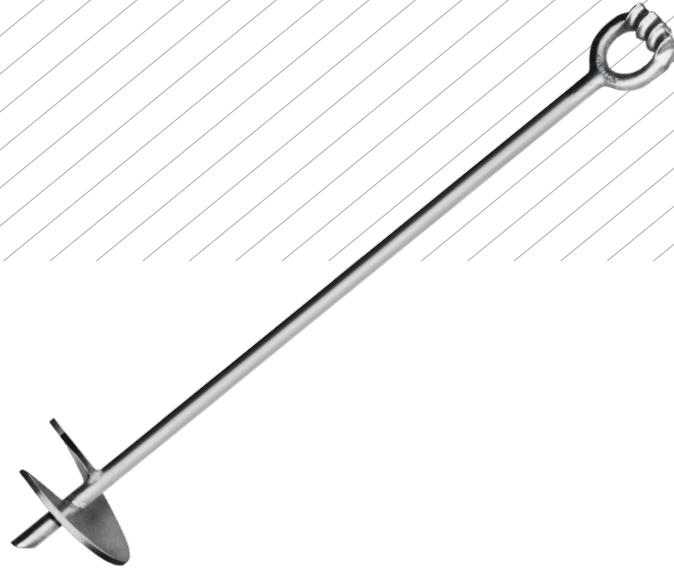

Product Description

DESCRIPTION:

- -Used for guying wires at utility poles.
- -Anchors are installed by simply turning anchor into ground. No Wrench Anchors may be driven by hand or with power equipment.
- -Eye dimensions are the same as Anchor Rods.
- -Screw anchors consist of an unthreaded triple eye rod with and angled point, and a firmly welded helix
- -Hot dip galvanized to meet ASTM Specification A153, Class C.
-

Catalog No.	Description	Anchor Size Dia.	Rod Dia. & Length	Std. Pkg. / Pallet	Holding Capacity (lbs. (kN)) vs Soil Class		
					Class 5	Class 6	Class 7
MP7011	Tripleye	4"	3/4 x 54	1/100	4500	3000	1500
MP702	Tripleye	6"	3/4 x 66	1/100	6500	5000	2500
MP703	Tripleye	8"	1 x 66	1/60	11000	9000	6000
MP704	Tripleye	10"	1-1/4 x 66	1/20	13000	10000	7000
MP705	Tripleye	10"	1-1/4 x 96	1/20	13000	10000	7000
MP706	Tripleye	14"	1-1/4 x 96	1/20	16000	15000	12000
MP707	Tripleye	15"	1-1/4 x 96	1/24	19000	17000	14000
MP708	Thimbleye	4"	3/4 x 54	1/100	4500	3000	1500
MP709	Thimbleye	6"	3/4 x 66	1/100	6500	5000	2500
MP700	Thimbleye	8"	1 x 66	1/60	11000	9000	6000